



Garden Lighting

Decorative Bollard Light

CE RoHS IP55



GNS-BL3409

Product Characteristic :-

- Body : High quality die-cast aluminum with treatment of corrosion protection and UV-proof powder coating
- Diffuser : Clear Polycarbonate
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection

Application :-


Urban streets, parks, squares, garden, villas and etc.

Technical Data :-

- Insulation Class : Class I
- Protection : IP55
- Finishing Color :

<table border="0"> <tr> <td style="width: 20px; height: 20px; background-color: white; border: 1px solid black; margin-right: 5px;"></td> <td>WHITE, RAL 9010</td> <td style="width: 20px; height: 20px; background-color: grey; border: 1px solid black; margin-right: 5px;"></td> <td>GREY, RAL 9006</td> <td style="width: 20px; height: 20px; background-color: black; border: 1px solid black; margin-right: 5px;"></td> <td>BLACK, RAL 9005</td> <td style="width: 20px; height: 20px; background-color: green; border: 1px solid black; margin-right: 5px;"></td> <td>GREEN, RAL 6010</td> </tr> <tr> <td style="width: 20px; height: 20px; background-color: blue; border: 1px solid black; margin-right: 5px;"></td> <td>BLUE, RAL 5017</td> <td style="width: 20px; height: 20px; background-color: maroon; border: 1px solid black; margin-right: 5px;"></td> <td>MAROON, RAL 3005</td> <td style="width: 20px; height: 20px; background-color: gold; border: 1px solid black; margin-right: 5px;"></td> <td>GOLD, RAL 1003</td> <td colspan="2"></td> </tr> </table>		WHITE, RAL 9010		GREY, RAL 9006		BLACK, RAL 9005		GREEN, RAL 6010		BLUE, RAL 5017		MAROON, RAL 3005		GOLD, RAL 1003			: Other RAL colors are available upon request.					
	WHITE, RAL 9010		GREY, RAL 9006		BLACK, RAL 9005		GREEN, RAL 6010															
	BLUE, RAL 5017		MAROON, RAL 3005		GOLD, RAL 1003																	

Dimensions (mm) :-

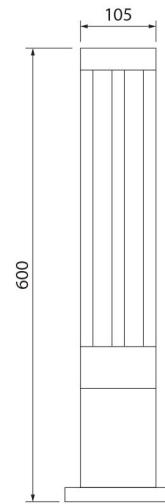

GNS-BL3409

Specifications :-

Item No.	GNS-BL3409
Power	5W
Lamp Type	Bridgelux LED COB
Input Power	AC85-265V, 50/60Hz
Lumen Efficiency	110lm/W
Color Rendering Index	Ra>80
LED Color	3000K/4000K/6000K
IP Rating	IP55
Weight	1.74kg

