



# Commercial Lighting

CE RoHS IP20



GNS-TRV324

**Product Characters :-**

- Body : High quality die-cast aluminum alloy body with heatsink
- Diffuser : Clear glass
- Reflector : High reflectivity made of high purity aluminum
- Gasketing : Silicon rubber gasket
- Fastener : Stainless steel with high intensity and corrosion protection


**Applications :-**

Facade, villas, parks, garden, squares, bridge etc.

**Specifications :-**

Model	GNS-TRV324
Power	15W   20W   28W   32W   38W   42W   45W
Voltage	AC220-240V, 50/60Hz
LED Chip	Bridgelux
Lumen	85-90lm/W
Color Rendering (CRI)	Ra≥80
Color	3000K   3500K   4000K   5000K
Beam Angle	12°, 15°, 24°, 36°, 45°, 60°
Power Factor	0.95
Driver	Osram
Dimming Option	Dali/0-10V/Triac
IP Rating	IP20
Lifespan	50,000hrs

**Dimensions (mm) :-**

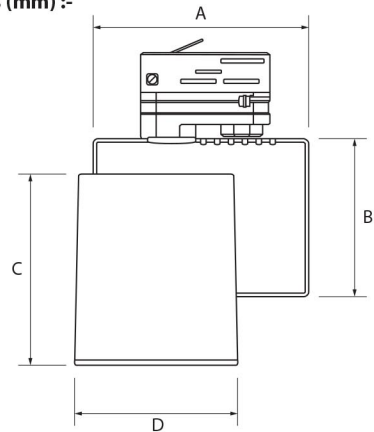

	A	B	C	D
<b>15W/20W</b>	130x50	80	92	ø83
<b>28W/32W</b>	140x51	101	115	ø93
<b>38W/42W</b>	140x51	101	125	ø106

