




# Architectural Lighting

CE RoHS IP67

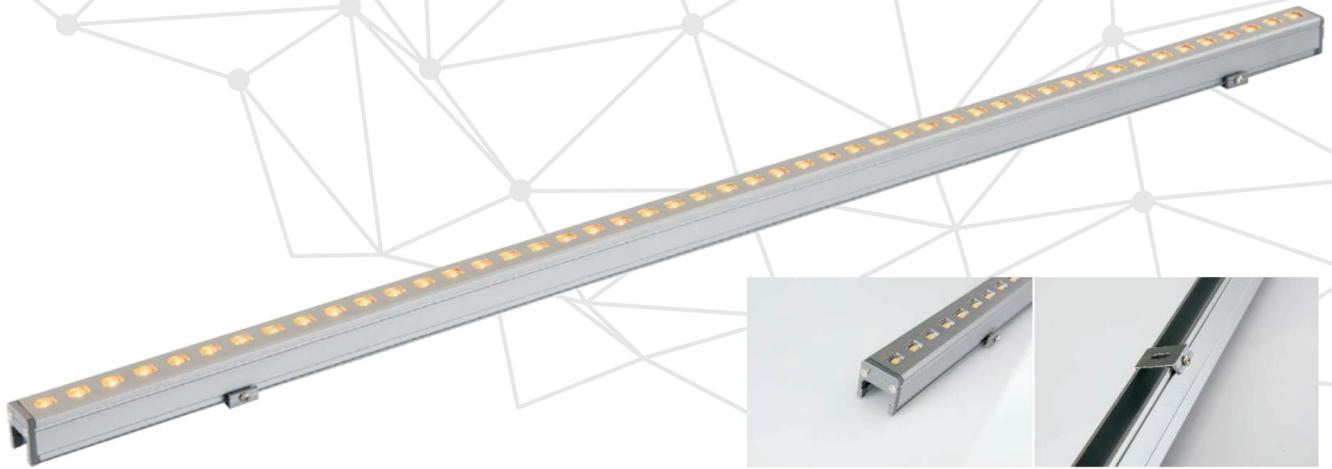


GNS-LL3028A

### Product Characters :-

- Body : High quality 6063 aluminum body, with high efficiency, excelent heat dissipation, surface treatment. With mounting bracket.
- Diffuser : Clear tempered glass
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection

### Dimensions (mm) :-



### Applications :-

Facade, villas, parks, garden, squares, bridge etc.

GNS-LL3028A

### Specifications :-

Item No.	GNS-LL3028A
Power	10W   12W
Voltage	DC24V
Color Rendering (CRI)	>70
Luminous Flux	110lm/W
Color Temperature	3000K/4000K/6000K
LED Chip	Sanan LED Chip
IP Rating	IP67
Beam Angle	120°
LED Lifespan	50,000 hours

