

GNS-SR115

Product Characters:

Body : High quality die-cast aluminum alloy

Lens : Clear polycarbonate

Gasketing : Thermostable silica gel to improve protection class
Fastener : Stainless steel with high intensity and corrosion

protection

Features : Optional - sensor, fully bright when human detected,

10% brightness when no one, automatic on-off,


charging during the day

Applications :-

Streets, highways, villas, parks, garden, squares etc.

Specifications :-

Item No.	GNS-SR115		
Power	20W	40W	60W
Luminous Flux	2200lm	4400lm	6600lm
LED Qty	20pcs	40pcs	60pcs
LED Type	Epistar SMD3030		
Luminous Efficiency	110lm/W		
Color Temperature	3000K~6500K		
IP Rating	IP65		
Battery	3.2V 6000mAh	3.2V 12000mAh	3.2V 18000mAh
Solar Panel	Polycrystalline Solar Panel		
Coloring Index (CRI)	>80		
Solar Panel P.Max	6V 7W	6V 9W	6V 15W
Light Distribution	40m²	60m²	80m²
Operating Hour	10Hrs/Night		
Pole Height	3~5M	6~8M	9~10M

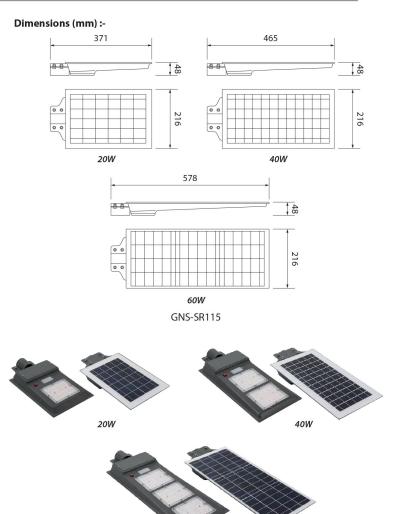

60W

