




Architectural Lighting

Buried Linear Light

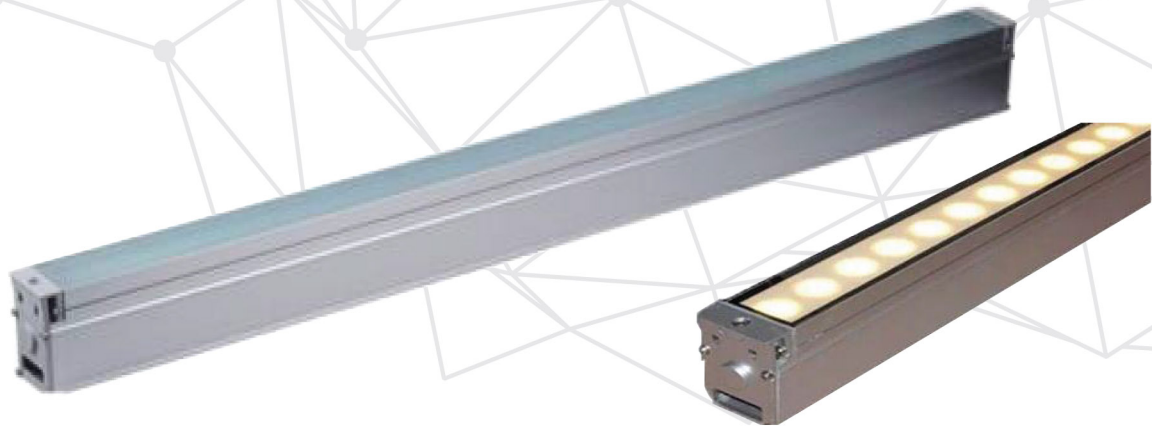


GNS-LN108

Product Characters :-

- Body : High pressure die-cast aluminum body, with high efficiency, excelent heat dissipation, surface treatment
- Diffuser : Tempered glass
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection
- Circuit Protection : Power Supply with Over Voltage Protection, Short Circuit Protection, and Over Current Protection. Light Source with Over Temperature Protection

Dimensions (mm) :-

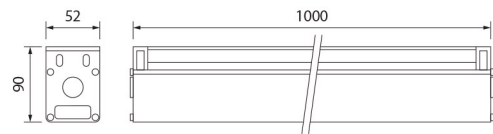

GNS-LN108

Applications :-

Facade, villas, parks, garden, squares, bridge etc.

Specifications :-

Item No.	GNS-LN108
Power	18W
Lumen Efficiency	80lm/W
Voltage	DC24V/AC220V
Beam Angle	15°, 30°, 45°, 60°, 120°
Color Rendering (CRI)	>80
Color Temperature	W, WW, NW, Y, R, G, B, RGB
IP Rating	IP65
LED Chip	18pcs*1W High Power LED
LED Lifespan	50,000 hours
Operating Temperature	-20°C to 55°C
Power Factor	0.9

