



GNS-LT010



Product Characters :-

- Body : High quality die-cast aluminum alloy
- Lens : Clear polycarbonate
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection
- Circuit Protection : Power Supply with Over Voltage Protection, Short Circuit Protection, and Over Current Protection. Light Source with Over Temperature Protection


Applications :-

Streets, highways, villas, parks, garden, squares etc.

Specifications :-

Item No.	GNS-LT010
Power	90W 120W 150W
LED Type	Philips/Osram
Voltage	AC85-305V, 50/60Hz
Luminous Flux	90W : ≥11250lm 120W : ≥15000lm 150W : ≥ 18750lm
Luminous Efficiency	>110-125lm/W
Color Temperature (CCT)	3000K/4000K/6500K
Coloring Index, CRI	>70
Power Factor	>0.98
Beam Angle	150° x 65°
Driver	Meanwell HLG
Working Temp.	-20°C ~ 50°C
Operating Humidity	20% ~ 90% RH
Protection Class	IP66
Lifespan	50,000 Hrs
Material	Aluminum / PC

Dimensions (mm) :-

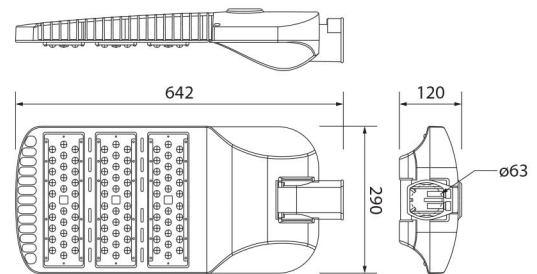

GNS-LT010

Photometric Data :-

