


Item No.	GNS-XLG80/150/250
Power	80W 150W 250W
LED Chip	CREE LED
Voltage	AC85-305V, 50/60Hz
Luminous Efficacy	≥100lm/W
Color Rendering (CRI)	>70
Color Temperature (CCT)	3000K/4000K/6000K
Protection Class	IP65
Power Factor	>0.95
Material	Aluminum / Glass

*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K).
Eg: GNS-XLG80-W

GNS-XLG80/150/250




GNS-FV30W/50W/100W

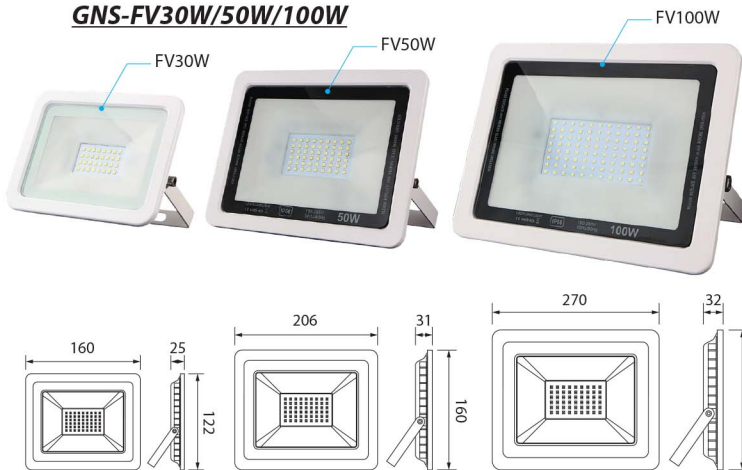

Item No.	GNS-FV30W/50W/100W-XX*
Power	30W 50W 100W
LED Chip	SMD3030
Voltage	AC180-265V, 50/60Hz
Luminous Efficacy	80lm/W
Color Rendering (CRI)	>80
Color Temperature (CCT)	3000K/4000K/6000K
Protection Class	IP66
Power Factor	>0.95
Material	Aluminum / Glass

*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K).
Eg: GNS-FV30W-W

GNS-FV150W/200W

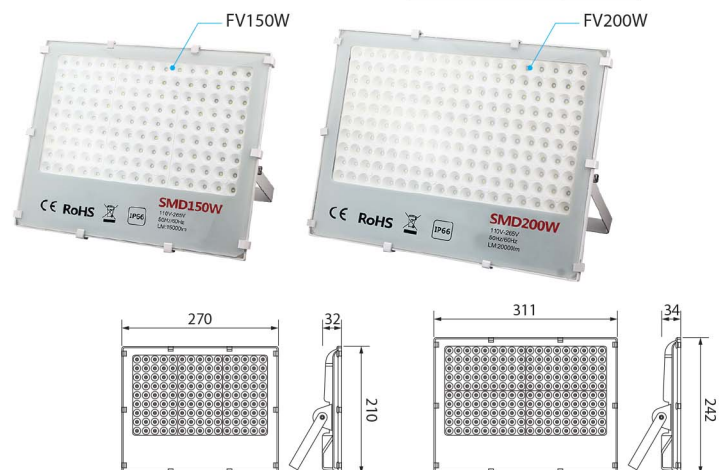

Item No.	GNS-FV150W/200W-XX*
Power	150W 200W
LED Chip	SMD2835
Voltage	AC180-265V, 50/60Hz
Luminous Efficacy	80lm/W
Color Rendering (CRI)	>80
Color Temperature (CCT)	3000K/4000K/6000K
Protection Class	IP66
Power Factor	>0.95
Material	Aluminum / Glass

*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K).
Eg: GNS-FV150W-W

GNS-PLSB80/100/150/200



Item No.	GNS-PLSB80/100/150/200-XX*
Power	80W 100W 150W 200W
LED Chip	Philips LED
Voltage	AC180-265V, 50/60Hz
Luminous Efficacy	≥117lm/W
Color Rendering (CRI)	>80
Color Temperature (CCT)	3000K-5700K
Protection Class	IP65
Power Factor	>0.93
Material	Aluminum / PC

*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K).
Eg: GNS-WW004-W