




Architectural Lighting

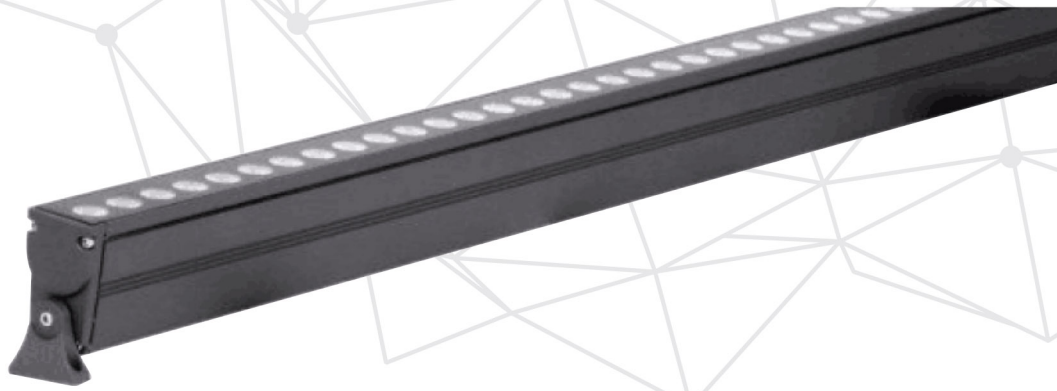

GNS-LN169

Product Characters :-

- Body : High quality 6063 aluminum body, with high efficiency, excellent heat dissipation, surface treatment. With mounting bracket.
- Diffuser : Clear tempered glass
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection
- Circuit Protection : Power Supply with Over Voltage Protection, Short Circuit Protection, and Over Current Protection. Light Source with Over Temperature Protection


Applications :-

Facade, villas, parks, garden, squares, bridge etc.


Specifications :-

Item No.	GNS-LN169		
Power	36W	48W	54W
LED Qty	2W*18pcs	2W*24pcs	2W*27pcs
Voltage	DC24V / AC220V		
Luminous Flux	60lm/W		
Color Rendering (CRI)	80		
Color Temperature	3000/4000K/6000K RGB		
IP Rating	IP65		
LED Chip	CREE		
Beam Angle	30°		
LED Lifespan	50,000 hours		
Operating Temperature	-20°C to 55°C		
Control Gear	Constant Driver, 300MA		
Insulation Class	Class III		
Power Factor	0.8		

Dimensions (mm) :-

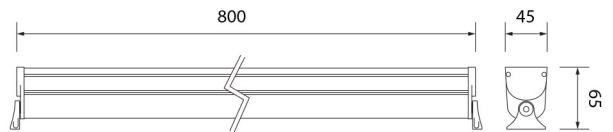

GNS-LN169-36W

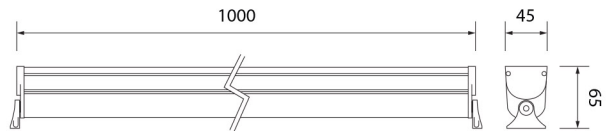

GNS-LN169-48W/54W

