


Item No.	GNS-MN002-XX*
Power	12W/M
LED Type	SMD2835
Voltage	AC200-265V, 50/60Hz
Beam Angle	180°
Lumen Efficiency	28lm/W
Color Temperature (CCT)	W, WW, NW, Y, R, G, B, P, A
Protection Class	IP65
Power Factor	≥0.93
Material	Silicon


\*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K), Y;Yellow, R;Red, G;Green, B;Blue, P;Purple, A;Amber. Eg: GNS-MN002-**WW**



**GNS-MN002**




**GNS-TW007**

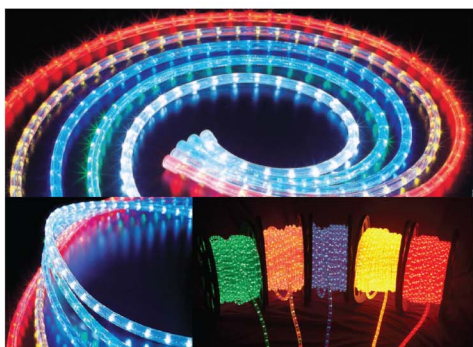

Item No.	GNS-TW007-XX*
Power	1.44W/M   2.4W/M
LED Type	High Power LED
Voltage	AC220V
Beam Angle	360°
LED Qty.	3600pcs/Roll
Color Temperature (CCT)	R, Y   B, G, W
Protection Class	IP66
Power Factor	>0.9
Material	Silicon

\*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K), Y;Yellow, R;Red, G;Green, B;Blue, Y;Yellow. Eg: GNS-TW007-**R**

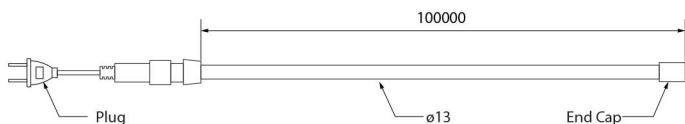

Item No.	GNS-Star Light A/B-XX*
Power	A : 40W~50W   B : 50W~60W
LED Type	High Power LED
Voltage	AC220V, 50/60Hz
Beam Angle	360°
Color Temperature (CCT)	W, WW, NW, Y, R, G, B, P, A
Protection Class	IP65
Power Factor	≥0.65
Material	Steel Frame/Twinkle Light

\*XX code = W; White(6000K), NW;Neutral White(4000K), WW; Warm White(3000K), Y;Yellow, R;Red, G;Green, B;Blue, P;Purple, A;Amber. Eg: GNS-MN002-**WW**



**GNS-Star Light A/B**

