




Architectural Lighting

Wallwasher Series

CE RoHS IP66

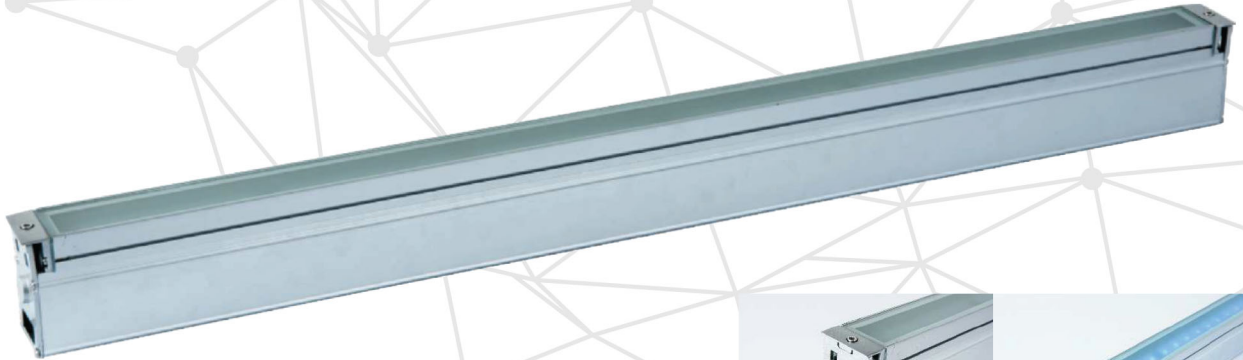


GNS-LN2821

Product Characters :-

- Body : High quality 6063 aluminum body, with high efficiency, excelent heat dissipation, surface treatment. With mounting bracket.
- Diffuser : Clear tempered glass
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection

Dimensions (mm) :-



Applications :-

Facade, villas, parks, garden, squares, bridge etc.

GNS-LN2821

Specifications :-

Item No.	GNS-LN2821	
Power	12W	18W
LED Qty	1W*12pcs	1W*18pcs
Voltage	DC24V / AC220V, 50/60Hz	
Color Rendering (CRI)	>70	
Luminous Flux	110lm/W	
Color Temperature	3000K/4000K/6000K RGB	
LED Chip	Sanan/Epileds/Epistar/Bridgelux LED Chip	
IP Rating	IP66	
Beam Angle	5°, 8°, 15°, 25°, 30°, 45°, 60°, 90°, 120°, 10x60°, 30x45°	
LED Lifespan	50,000 hours	

