



Commercial Lighting

Track Light Series

CE RoHS IP20



White

Grey

GNS-TRV536


Product Characters :-

- Body : High quality die-cast aluminum alloy body with heatsink
- Diffuser : Clear glass
- Reflector : High reflectivity made of high purity aluminum
- Gasketing : Silicon rubber gasket
- Fastener : Stainless steel with high intensity and corrosion protection

Applications :-

Facade, villas, parks, garden, squares, bridge etc.

Dimensions (mm) :-

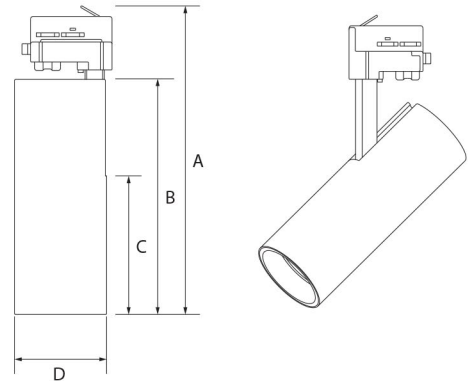

	A	B	C	D
15W/20W	277	200	100	ø70
28W/32W	312	235	135	ø85
38W/42W	322	245	145	ø95

Specifications :-

Model	GNS-TRV536
Power	15W 20W 28W 32W 38W 42W
Voltage	AC220-240V, 50/60Hz
LED Chip	Bridgelux
Lumen	85-90lm/W
Color Rendering (CRI)	Ra≥80
Color	3000K 3500K 4000K 5000K
Beam Angle	12°, 24°, 36°, 45°, 60°
Power Factor	0.95
Driver	Osram
IP Rating	IP20
Lifespan	50,000hrs

