

# STREET LANTERN




**GNS-LT009**



## Product Characters :-

- Body : High quality die-cast aluminum alloy
- Lens : Clear polycarbonate
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection
- Circuit Protection : Power Supply with Over Voltage Protection, Short Circuit Protection, and Over Current Protection. Light Source with Over Temperature Protection

## Dimensions (mm) :-

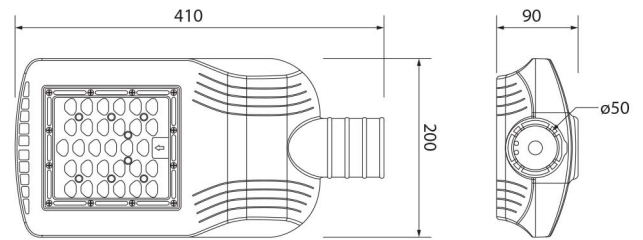

GNS-LT009

## Applications :-

Streets, highways, villas, parks, garden, squares etc.

## Specifications :-

Item No.	GNS-LT009
Power	40W   50W   60W
LED Type	Philips 3030 SMD LED
Voltage	AC100-240V, 50/60Hz
Luminous Flux	40W : 4500-5050lm   50W : 5600-6000lm   60W : 6400-6780lm
Luminous Efficiency	40W : >113lm/W   50W : >115lm/W   60W : >110lm/W
Color Temperature (CCT)	3000K/4000K/6500K
Coloring Index, CRI	>80
Power Factor	>0.98
Beam Angle	150° x 65°
Driver	Meanwell HLG
Working Temp.	-20°C ~ 50°C
Operating Humidity	20% ~ 90% RH
Protection Class	IP66
Lifespan	50,000 Hrs
Material	Aluminum / PC

## Photometric Data :-

