



Floodlight Series

Architecture Lighting

CE RoHS IP66



GNS-PS1256

Product Characteristic :-

- Body : High quality extruded/cast aluminum with treatment of corrosion protection and UV-proof powder coating
- Diffuser : Clear tempered glass
- Gasketing : Thermostable silica gel to improve protection class
- Fastener : Stainless steel with high intensity and corrosion protection

Application :-

Urban streets, parks, squares, garden, villas and etc.


Technical Data :-

- Insulation Class : Class I
- Protection : IP66
- Finishing Color : White/Grey. Other RAL colors are available upon request.


Specifications :-

Item No.	GNS-PS1256
Power	288W
LED Type	288pcs*1W Bridgelux/Epistar/Epileds
Voltage	AC110-240V/DC24V
Beam Angle	5°, 15°, 25°, 30°, 45°, 60°, 90°, 120°, 10x60°, 30x45°
Color Temp.	RGB
Color Rendering	Ra≥70
Protection Class	IP66
Power Factor	0.9

Dimensions (mm) :-

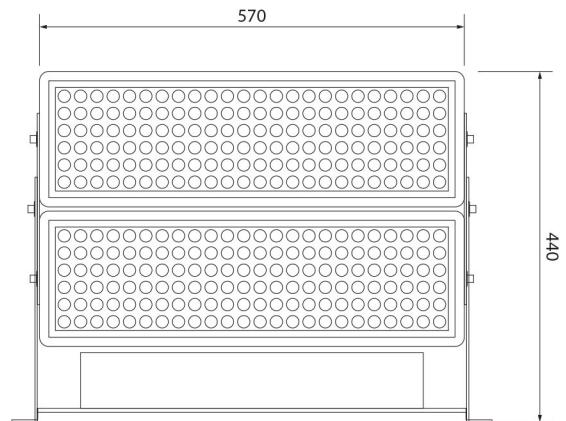

GNS-PS1256

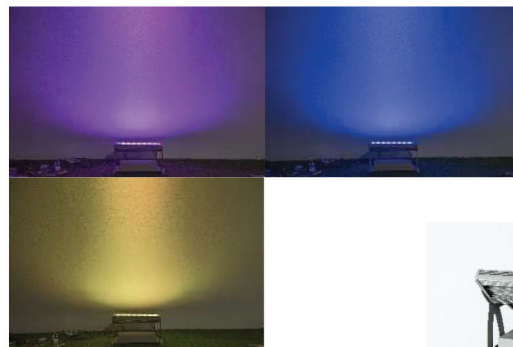

Beam Angle :-

